



# BULLET LIGHT


## TS-BFLO125-25W-H-TCP

This Landscape spot light series is an ideal solution for general site, landscape, sign and pathway lighting. Constructed of a die cast aluminum housing, and a polycarbonate lens with seamless silicone gasket to prevent leaks, it will stand up to many years of punishing environmental conditions. This flood light is 15W/20W/25W wattage selectable and 3K/4K/5K Kelvin selectable.



### PRODUCT FEATURES


- \* Color temperature: 3000K, 4000K, 5000K selectable
- \* Wattage selectable: 15 / 20 / 25W
- \* Lumens per watt: 120 Lm -3000 lumens @25W
- \* Long-life LEDs provide 50,000 hours of operation with at least 70% of initial lumen output (L70)
- \* Universal 100-277 VAC input
- \* 0-10V dimming standard
- \* Power factor > 0.90
- \* Color rendering index > 80
- \* Die cast aluminum housing with durable, Dark bronze powder coat paint.
- \* Polycarbonate lens
- \* Beam Angle : 40 degrees
- \* Operating temperature: -40F - 113 F

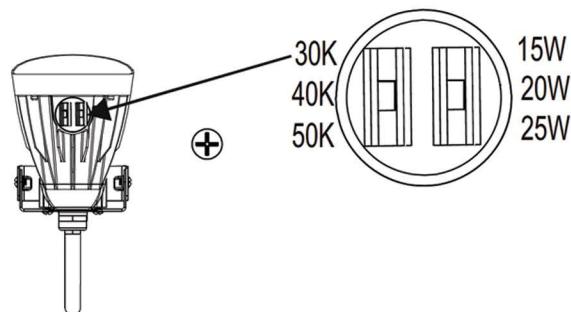

### WARRANTY / LISTING

- \* DLC Premium listed
- \* ETL Listed
- \* Waterproof rating: Wet location
- \* 5-year warranty on all electronics and housing

### DIMENSIONS

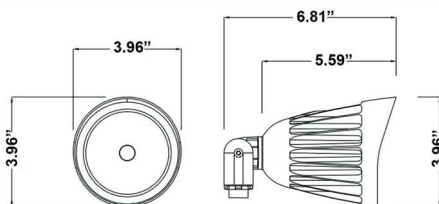

### MOUNTING OPTIONS



- \* Threaded pipe (NPT 1/2"), which attaches to a junction box, is standard
- \* Optional spike-mount (ALS-LND-SPIKE) for ground mounting
- \* Optional canopy-mount (FL17-CPYPLATE) for attachment to flat surface. Enclosure is sealed with a water-tight, silicon rubber gasket

### PRODUCT SPECIFICATIONS

PART #	Kelvin selectable	Wattage selectable	Lumens	Lumens
TS-BFL0125-25W-H-TCP	30K, 40K, 50K	15,20,25	3,000	120



# BULLET LIGHT

## TS-BFLO125-25W-H-TCP

### PHOTOMETRIC DATA

