

## EPCL

The EPCL series is designed to fit where no other recessed fixture can due to its IC rating and air tight construction; no can housing is needed. At only 1.75-2.25" thick, this fixture is ideal for ceilings with limited space. This ultra thin wafer gimbal LED delivers 650 lumens (3") and 1000 lumens (4") of light in Kelvin selectable 3K , 4K & 5K



### PRODUCT FEATURES

- 360° directional rotatable and 45° tilt
- Type IC Rated: No Housing Required
- Air Tight: Suitable for Damp Locations
- Junction Box Complies to ETL Safety Standard
- High Lumens Output
- Triac Dimmable
- \* Easy Installation (labor cost saving)

- Applications: Recessed
- Color Temperature: Kelvin selectable 3K, 4K, 5K
- CRI: >80
- Beam Angel: 24° for 3" and 38° for 4"
- Input: AC90~130V
- Power Factor: 0.9
- Lifetime: 50,000 hours
- Compatible dimmers: Lutron, Legrand, Leviton
- Led Type: COB

### WARRANTY / LISTING

- ETL Listed for damp locations in US & Canada (new construction & retrofit)
- IC rated for direct contact with insulation
- Energy Star certified
- Passes FCC Class A
- Five year warranty on all electronics and housing

### DIMENSIONS



|                         | DIMENSION 3"    | DIMENSION 4"  |
|-------------------------|-----------------|---------------|
| Outer Diameter of light | 83 mm – 3.25"   | 128 mm – 5"   |
| Cut Hole of Light       | 65 mm – 2.55"   | 115 mm - 4.5" |
| Height of Light         | 45 mm – 1.77"   | 58 mm – 2.25" |
| Length of Junction Box  | 59 mm – 2.32"   | 100 mm – 4"   |
| Width of Junction Box   | 82.5 mm – 3.25" | 68 mm – 2.68" |
| Height of Junction Box  | 37.5 mm – 1.50" | 35 mm– 1.38"  |

### PRODUCT SPECIFICATIONS

| PART #           | Size      | KELVIN   | LUMENS | ENERGY USED | HALOGEN EQUIVALENT |
|------------------|-----------|----------|--------|-------------|--------------------|
| EPCL-8X-ETL-COB  | 3" Gimbal | 3K,4K,5K | 650    | 8W          | 80W                |
| EPCL-15X-ETL-COB | 4" Gimbal | 3K,4K,5K | 1000   | 15W         | 100W               |

## EPCL

### PHOTOMETRIC DATA 3"

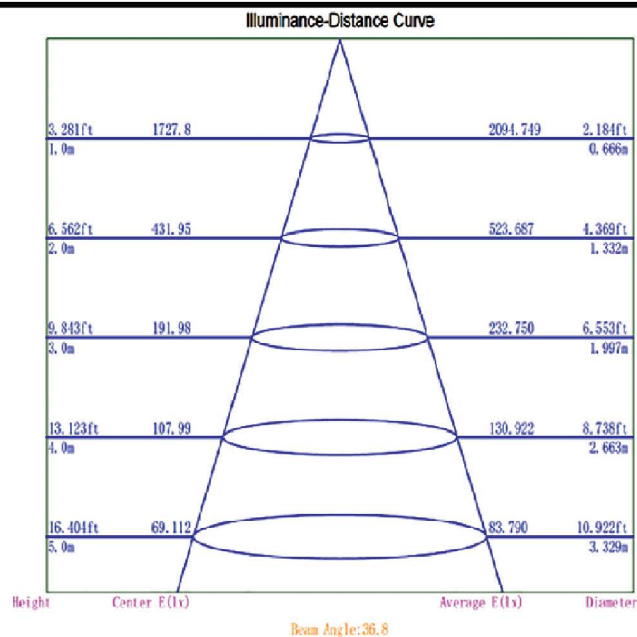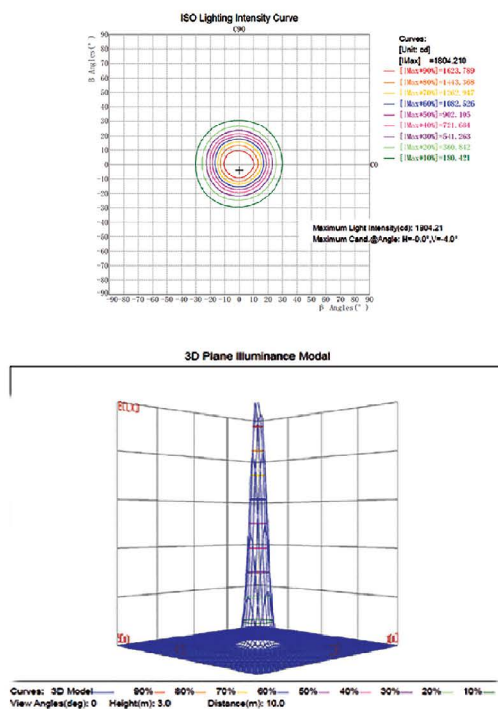

### PHOTOMETRIC DATA 4"

