



TRADITIONAL LED GLASS WALL PACK



ALS-TWP-XXX-27-TCP-PC

This ALS-TWP is a series of premium, rugged, and durable LED wall packs, which are perfect for outdoor perimeter and area lighting. With a die cast aluminum housing and a glass lens, the ALS-TWP will stand up to many years of punishing environmental conditions. These wall packs come standard with a kelvin selectable switch located inside allowing users to switch between 3000K, 4000K and 5000K. They are also wattage selectable 30W, 40W, 60W for the ALS-TWP-60S and 80W, 100W, 120W for the ALS-TWP-120




PRODUCT FEATURES

- * Tunable CCT 3K, 4K and 5K
- * TWP-60S: Lu/W: 140 / 3K ; 150 / 4K ; 142 / 5K
- * TWP-120: Lu/W: 138 / 3K ; 152 / 4K ; 139 / 5K
- * Wattage selectable: 30W, 40W, 60W TWP-60S
- * Wattage selectable: 80W, 100W, 120W TWP-120W
- * Premium Sosen driver on the 120-277AC voltage models - Lumiled LED SMD 2835
- * Universal 120-277 AC voltage (50-60Hz) is standard.
- * A 20KV Surge protector is included on the 120-277 AC models.
- * 200-480 AC voltage (50-60 HZ) available on the 120W model.
- * Power factor > 0.90, Total harmonic distortion < 15%
- * Beam Angle: 50% +/- 15%
- * Color rendering index > 80
- * Die cast aluminum housing with dark bronze, powder coat paint - Stripe glass lens
- * Factory installed Emergency Driver on the 120-277AC 120W model available
- * Easy installation in new construction or retrofit

WARRANTY / LISTING

- * UL Listed
- * DLC premium Listed
- * IP 65 rated sealed with silicone ring
- * 5-year warranty on all electronics and housing
- * Working temperature : -40 F - 122 F

DIMENSIONS

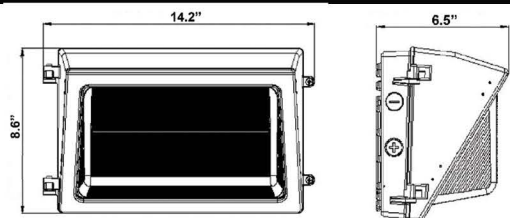

PRODUCT SPECIFICATIONS

PART #	Color Temp	Lumens	Selectable wattage	Included	Voltage
ALS-TWP-60S-27-TCP-PC	CCT 3K/4K/5K	3,819 to 8,353	30W, 40W, 60W	Photocell	120-277V
ALS-TWP-120-27-TCP-PC	CCT 3K/4K/5K	10,200 to 16,752	80W, 100W, 120W	Photocell	120-277V
ALS-TWP-120-27-TCP-PC-EM	CCT 3K/4K/5K	10,200 to 16,752	80W, 100W, 120W	Photocell	120-277V
ALS-SWP11M-120W-3CCT-PC-HV	CCT 3K/4K/5K	17,140/ 18,120/ 17,250	80W, 100W, 120W	Photocell	200-480V

Specifications subject to change without notice **Alliance LED Solution** - 1309 Coffeen Ave - Suite 1200 - Sheridan, WY 82801
manager@allianceledsolution.com - 972-555-1212 - allianceledsolution.com



TRADITIONAL LED GLASS WALL PACK



ALS-TWP-XXX-27-TCP-PC

LUMEN DATA

Lumen 60W Wall pack

CCT	3000K	4000K	5000K
30 WATT LUMENS	3,819	4,176	5,208
40 WATT LUMENS	5,088	5,580	5,168
60 WATT LUMENS	7,626	8,352	7,752

Lumen 120W Wall pack

CCT	3000K	4000K	5000K
80 WATT LUMENS	10,200	11,088	10,288
100 WATT LUMENS	12,710	13,960	12,960
120 WATT LUMENS	15,240	16,752	15,552