



EMERGENCY DRIVERS

BLD-GM30H-20W

The Billa BLD-GM30H-20W is a 20W LED emergency driver designed for LED fixtures where low voltage output is accessible. Designed to mount remotely or on top of the fixture. Rated to provide a minimum of 90 minutes of emergency illumination. Great for Schools, hospital, warehouses.

Ideal for :



up to 220W
linear high bays



PRODUCT FEATURES

- Emergency power: 20W
- For use with switched or unswitched fixtures
- Built-in lithium Battery
- Universal 120-347V, 50-60 Hz input
- Output current: 130-400mA
- Output power: 20W ; DC50-150V

- Short circuit protection
- High temperature, maintenance free NI-Mh battery
- Meets 500 cycles of standard charge and discharge
- 90 Minute minimum emergency operating time over full temperature range
- 24 Hour maximum battery recharge time
- IP rating: waterproof IP65

WARRANTY / LISTING

- Five year warranty on all electronics and housing
- Meets standard CSA C22.2 No 141, UL924, NFPA 101 Life Safety Code, NEC, /OSHA, Local and State Codes
- UL listed for factory or field installation
- Suitable for damp locations (32°F - 104°F)


MOUNTING

- Suitable for installation on top or in remote of the fixture
- Can be used in both switched and unswitched fixtures


HOUSING

- Durable painted steel construction in orange finish

DIMENSIONS

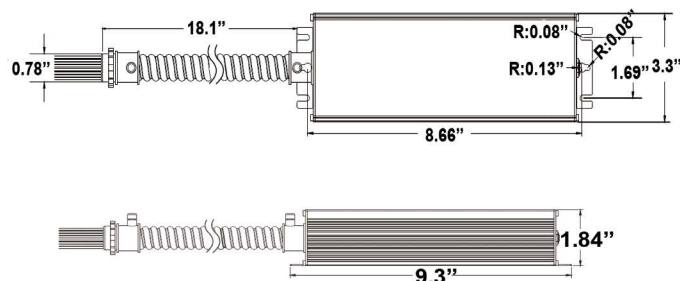

WIRING DIAGRAM

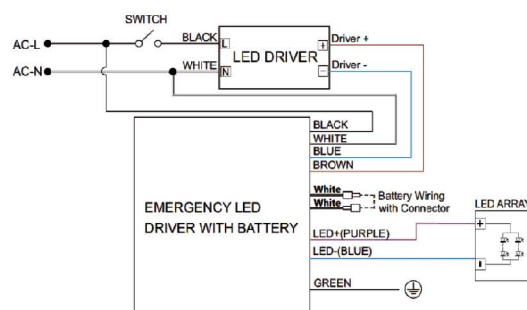

- Do not mate connector until installation is complete and AC power is supplied
- Test accessory leads and observe proper polarity wiring

PRODUCT SPECIFICATIONS

PART #	Battery	Power	Output Power
BLD-GM30H-20W	Li-on 11.1V 4000 mA	20W	DC 50-150V

Specifications subject to change without notice **Alliance LED Solution** - 1309 Coffeen Ave - Suite 1200 - Sheridan, WY 82801
manager@allianceledsolution.com - 972-555-1212 - allianceledsolution.com